

- Draft -

Application: DC capacitor for general use in power electronics
also for nonsinusoidal voltages and currents
Order code: E67.R12-474W40
Standards: acc. to IEC 61071:2017

Characteristics

Rated capacitance	C_N	470 $\mu\text{F} \pm 10\%$
Rated d.c. voltage	U_{NDC}	1100 V
Max. ripple voltage (peak - peak)	U_r	250 V
Non-recurrent surge voltage	U_s	1650 V
Rated energy	E_N	284 Ws
Maximum current (rms)	I_{max}	80 A
Maximum peak current	$\hat{I}$	8.8 kA
Maximum surge current	I_s	26.4 kA
Series resistance	R_s	0.29 m Ω
Dielectric dissipation factor	$\tan\delta_o$	2×10^{-4}
Self discharge time constant	$C \times R_{is}$	> 25000 s
Self inductance	L_e	10 nH

Thermal conditions

Lowest operating temperature	Θ_{min}	-50 °C
Maximum operating temperature	Θ_{max}	85 °C ¹⁾
Thermal resistance	R_{th}	4.8 K/W
Storage temperature	$\Theta_{storage}$	-40..+85 °C

Statistical lifetime

Failure rate	> 200000 h
at $\Theta_{hotspot}$	<100 FIT ²⁾
	≤ 70 °C

2) See FIT-RATE diagram on p.3

Routine test voltages

Voltage test between terminals	U_{TT}	1650 V DC/10s (alternatively 1.1 U_{TT} / 2s)
A.C. voltage test terminals/case	U_{TC}	3840 V AC/2s


Dimensions in mm

Rated diameter	D_1	116 (± 1)
Maximum diameter	D_2	$D_1 + 7$ max.
	D_3	100 (± 1)
Length of the case	L_1	126 (± 1)
Length incl. Terminals	L_2	134 (± 2)
	L_3	20.5 (± 1)
Distance btw. terminals	a	50 (± 0.5)
	b	50 (± 0.5)
Terminals		M6x12 (± 0.5)
Base mounting stud	G_B	3xM8x11 (+1)
	L_B	12.5 (± 1.5)
Clearance in air	L	18
Creepage distance	K	24
Approx. weight		1.3 kg


Mechanical characteristics

Dielectric	metallized polypropylene capacitor, self healing
Construction	metal can, plastic cover rated V0 acc. to UL94
Terminals	internal thread M6x12i
Protection	protected, externally mounted, irreversible overpressure switch triggered by the internal pressure (normally closed)
Impregnant	filled with nitrogen, no liquid filling material
Fire load	52MJ

Outline drawing

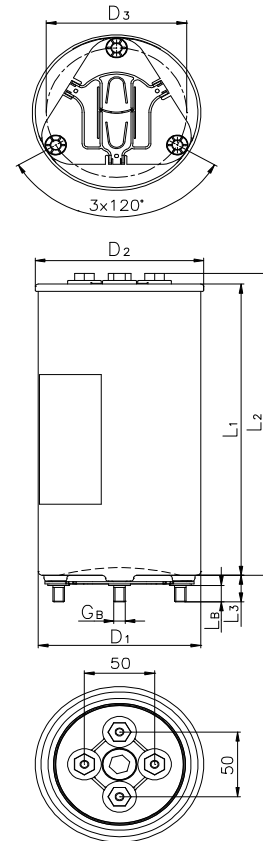

Permitted power losses during continuous operation³⁾

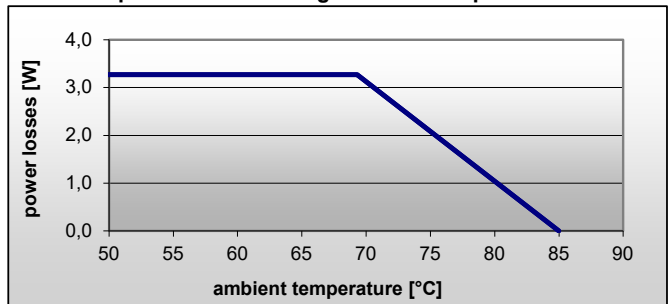

3) note FIT-RATE diagram on p.3

Special Operating Instruction for E67

Design W4; W6


Permitted torque

M6 Internal thread	7.5 Nm
M8 bottom stud	5 Nm

Condensation, Humidity

The mentioned limited values for humidity must not be exceeded even during storage.

Humidity class C and TX / Feuchtekategorie C und TX

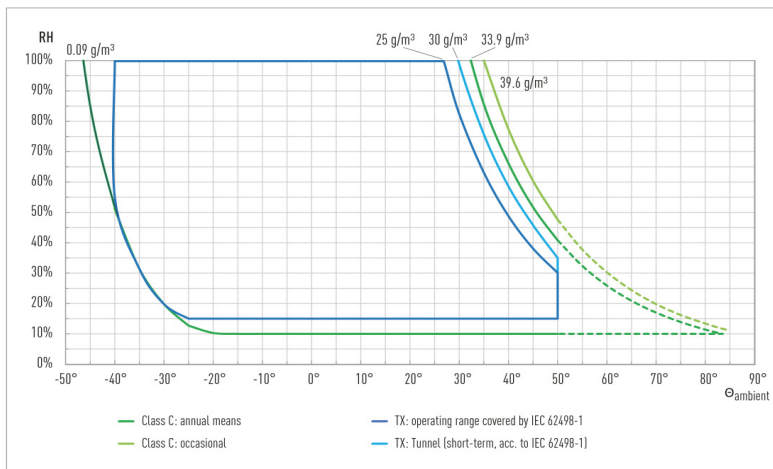

Environment for Operation and Storage

Capacitors shall be stored and operated in dry environment and in conformance with the specified climatic class. Do not expose capacitors to rain or direct sun. Do not store or operate capacitors in, or close to, aggressive environments and corrosive atmosphere e.g. acids, sulphide, chlorine/chlorides, salt mist, etc.

Avoid the deposition of dust and dirt on the capacitors which may obstruct the creepage distances between terminals. Principally, capacitors made of metallized polypropylene do not have a limited shelf life if stored properly. However please note that capacitors in non-hermetical housing may suffer from humidity and other environmental factors if left unused for a long period. Please consult us if in doubt about the condition of your capacitors after long storage or storage under doubtful circumstances.

Mounting Position

Gas filled capacitors can be mounted in any position. A position with terminals pointing downwards shall be avoided!

Earthing

Capacitors with a metal case must be earthed at a separate metal strap or clamp.

Where such earthing is impossible, the case must at least be set to a defined potential within the operating voltage range of the capacitor.

Spezielle Vorschriften für E67

Bauform W4; W6

Zulässige Drehmomente

M6 Innengewinde	7.5 Nm
M8 Bodenbolzen	5 Nm

Betauung, Luftfeuchte

Die vorgegebenen Feuchtegrenzen dürfen auch bei der Lagerung der Kondensatoren nicht überschritten werden.

annual average	< 75% RH
30 days/ year continuously	75% .. 95% RH
all other days occasionally	95%... 100% RH

Jahresdurchschnitt	< 75% RH
30Tag/Jahr dauerhaft	75% .. 95% RH
all anderen Tage gelegentlich	95%... 100% RH

Kondensatoren müssen in trockener Umgebung und in Übereinstimmung mit der angegebenen Klimaklasse gelagert und betrieben werden. Kondensatoren dürfen keinem Regen oder direkter Sonneneinstrahlung ausgesetzt werden. Lagern oder betreiben Sie keine Kondensatoren in, oder in der Nähe, von aggressiven Umgebungen und korrosiver Atmosphäre, z. Säuren, Sulfide, Chlor / Chloride, Salznebel usw.

Vermeiden Sie die Ablagerung von Staub und Schmutz auf den Kondensatoren, die die Kriechstrecken zwischen den Anschlüssen verringern könnten. Grundsätzlich haben Kondensatoren aus metallisiertem Polypropylen bei sachgemäßer Lagerung keine begrenzte Haltbarkeit. Bitte beachten Sie jedoch, dass Kondensatoren in nicht hermetischen Gehäusen unter Feuchtigkeit und anderen Umwelteinflüssen leiden können, wenn sie für längere Zeit nicht benutzt werden. Bitte wenden Sie sich an uns, wenn Sie nach längerer Lagerung oder Lagerung unter fraglichen Umständen Zweifel an dem Zustand Ihrer Kondensatoren haben.

Einbaulage

Gasgefüllte Kondensatoren können ohne Einschränkung in jeder Lage eingebaut werden. Kopfstehende Montage vermeiden!

Erdung

Kondensatoren mit Metallgehäuse sind bei Einbau zu erden. Hierzu kann eine Schelle verwendet werden.

Wo eine solche Erdung nicht möglich ist, muss das Gehäuse zumindest auf ein definiertes Potential innerhalb des Betriebsspannungsbereichs des Kondensators eingestellt werden.

CAUTION

Please short-circuit the terminals before touching any life part!

Use standardized non-magnetic parts for fastening cables or bus bars to avoid inductive heating of the terminals. We recommend using nuts and screws either nickel-plated, or tinned with nickel barrier coating, to protect against electrochemical corrosion and the formation of whiskers.

Capacitor terminals shall not be used as distribution points for cables or bus bars.

FIT rate (Failures In Time)

The FIT rate reflects the probability of failures during the operating period under selected operating conditions.

Any failure rate of a capacitor is very closely linked with the operating temperature and the applied operating voltage. As standard, the FIT rates stated in our data sheets are assuming a capacitor hotspot temperature of 70°C and operation at rated voltage. Unless stated otherwise, they are related to a reference operating interval of $t=100,000$ hours. After the reference interval, the capacitors will continue operating; however the probability of failures may change. Note: the FIT rate cannot give information about the individual lifespan or the expected moment of failure of a capacitor.

Service cycles may be calculated based on the so-called MTBF value (mean time between failures): $MTBF = 10^9 / FIT$.

The simultaneous operation of capacitors at highest permissible voltage and operating temperature should be avoided; otherwise, failure rates may increase beyond reasonable technical reliability.

The following diagram is based on our current state of knowledge derived from test data and experience. It describes the influence of temperature and voltage on the FIT rate:

Achtung

Beim Arbeiten an installierten Kondensatoren sind die Anschlüsse vor dem Berühren in jedem Fall erst kurzzuschließen.

Verwenden Sie genormte nichtmagnetische Teile zur Befestigung von Kabeln oder Stromschienen, um eine induktive Erwärmung der Klemmen zu vermeiden. Wir empfehlen zum Schutz vor elektrochemischer Korrosion und vor Bildung von Whisker die Verwendung von Muttern und Schrauben, die entweder vernickelt oder mit Nickel-Sperrschicht vergütet sind.

Kondensatoranschlüsse dürfen nicht als Verteilungsstellen für Kabel oder Sammelschienen verwendet werden.

FIT-Rate


Die FIT-Rate (Failures In Time) spiegelt die Wahrscheinlichkeit von Ausfällen während der Nutzungsdauer unter bestimmten Betriebsbedingungen wider. Die Ausfallrate eines Kondensators ist stark abhängig von der Temperatur und der Betriebsfeldstärke. Die FIT-Raten in unserem Standardsortiment beziehen sich – sofern nicht anders angegeben - auf ein aus technischer und statistischer Sicht realistisches Betriebsintervall von 100.000 Stunden bei Nennspannung, unter Annahme einer Dielektrikumstemperatur (=Hotspot-Temperatur) von 70°C. Nach Ablauf des Referenzzeitraums werden die Kondensatoren auch weiterhin funktionieren, allerdings kann sich die Ausfallwahrscheinlichkeit ändern. Achtung: Die FIT-Rate ermöglicht keine Aussagen über die individuelle Lebensdauer oder den konkreten Ausfallzeitpunkt eines Kondensators.

Zur Berechnung von Wartungszyklen wird mitunter auch der sogenannte MTBF (mean time between failures) verwendet. Hier gilt die Beziehung: $MTBF = 10^9 / FIT$.

Der Betrieb von Kondensatoren mit der höchsten zulässigen Spannung und der höchsten zulässigen Betriebstemperatur sollte vermieden werden, andernfalls können die Ausfallraten so hoch werden, dass keine technisch sinnvollen Zuverlässigkeiten mehr gewährleistet sind.

Das nachfolgende Diagramm basiert auf langjährigen empirischen Erfahrungen und zahlreichen gezielten Zuverlässigkeitsprüfungen. Es beschreibt den Einfluß von Temperatur und Spannung auf die FIT-Rate.

FIT-RATE versus HOTSPOT temperature and voltage

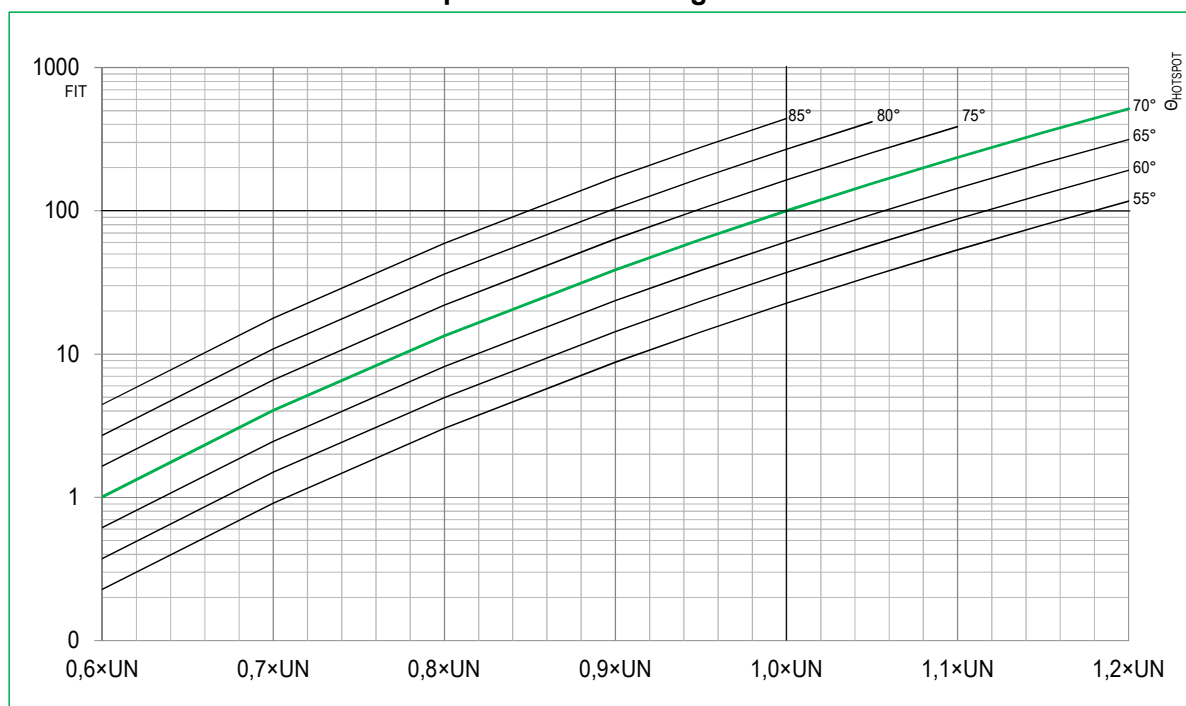

Pressure Switch

Capacitors which are not actively monitored by the electronics of the application can be provided with a pressure switch to prevent rupture and explosion. The pressure sensor enables reliable triggering by the internal overpressure in the event of failure and its signal can be used for safe disconnection in case of malfunctioning.

! Caution!

Capacitors with activated pressure switch must not be re-commissioned even after the internal pressure would have reduced again. The monitoring circuit has to be designed in such way that the capacitors are locked against re-connection.

Electrical Properties:

DC/AC 24V 10 mA - 2A at an ambient temperature of max. 85 °C
 Resistance typical 150 mOhm incl. 2 contacts

Customer interface:

EdgeLock Crimp Terminal 2004490001
 EdgeLock WTE case 2008900102

cable:

22-24 AWG, Insulation 1.10mm - 1.40mm
 - 40°C to + 105°C

Druckschalter

Der Kondensatoren kann über den externen irreversiblen Druckschalter, einen internen Überdruck/Defekt anzeigen. Um Bruch und Explosion des Kondensators zu verhindern, muss der Drucksensor durch den Anwender kontinuierlich ausgewertet werden und bei aktiviertem Druckschalter der Kondensator unverzüglich entladen werden. Der Energieeintrag in den defekten Kondensator ist entscheidend für den verbesserten Schutz.

Achtung

Die Überwachung des Kondensatordruckschalters durch den Anwender muss sicherstellen, dass Kondensatoren mit aktiviertem Druckschalter nie wieder mit Spannung geladen werden!

Elektrische Eigenschaften:

DC/AC 24V 10 mA - 2A bei einer Umgebungstemperatur von maximal 85°C
 Widerstand typ. 150 mOhm incl. 2 Kontakte

Schnittstelle Kunde

EdgeLock Crimp Terminal 2004490001
 EdgeLock WTE Gehäuse 2008900102


Leitung:

22-24 AWG, Isolation 1.10mm bis 1.40mm
 Umgebungstemperatur: - 40°C to + 105°C

Schematic diagram of the safety circuit:



circuit diagram for pressure switch

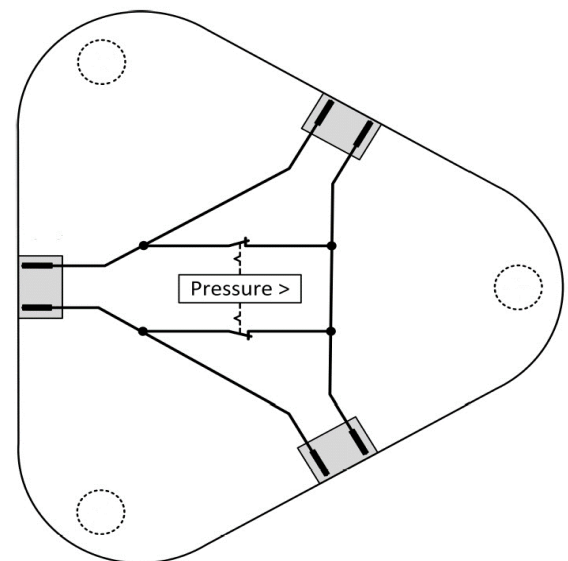

DEFINITIONS for Capacitors in Power Electronics**Rated capacitance C_N**

Capacitance value rated at 20°C / 50 Hz.

Rated Voltage U_N

The maximum or peak voltage of either polarity of a reversing or nonreversing type wave form for which the capacitor has been designed and rated (unlike other standards for AC capacitors, the rated voltage is not the rms value).

Non repetitive peak (non-recurrent surge) voltage U_S

Voltages beyond the rated voltage induced by switching or faults of the system or any part of it. Maximum count 1000 times with a duration of not more than 100 ms each.

rms voltage U_{rms}

Root mean square of the max. permissible value of sinusoidal AC voltage in continuous operation.

Ripple voltage U_r

The peak-to-peak alternating component of the unidirectional voltage.

Voltage test between terminals U_{TT}

Routine test of all capacitors conducted at room temperature, prior to delivery. A further test with 90% of the test voltage stated in the data sheet may be carried out once at the user's location.

Voltage test between terminals and case U_{TC}

Routine test of all capacitors conducted at room temperature and case, conducted at room temperature. May be repeated once at the user's location.

Maximum current I_{max}

Maximum rms value of permissible current in continuous operation. The values given in the data sheets are related to either the specified maximum power dissipation or the current limits of the connection terminals.

Peak current $\hat{I}$

Maximum permitted repetitive current amplitude during continuous operation.

Non-repetitive peak current (surge) I_S

Maximum current that may occur non-repetitively and briefly in the event of a fault.

Equivalent series resistance R_S

Equivalent resistance representing the sum of all Ohmic resistances occurring inside the capacitor. Essential for calculation of the current dependent losses.

Self-inductance L_e

Represents the sum of all inductive elements which are – for mechanical and construction reasons – contained in any capacitor. As a rule, the values stated in our data sheets and catalogues are based on calculations or practical experience. Usually, these values are sufficient for proper calculation of the application. Please contact us if you require more detailed data or measurements.

Resonant frequency f_{res}

The capacitance and self-inductance of any capacitor form a series resonant circuit. Above the resonant frequency, the inductive part of this LC-circuit prevails. The capacitor would then behave as an inductor.

Dielectric dissipation factor $\tan\delta_0$

Constant dissipation factor of the dielectric material for all capacitors in their rated frequency.

Thermal resistance R_{th}

The thermal resistance indicates by how many degrees the capacitor temperature rises at the hotspot due to dissipation losses.

This temperature rise relates to the surrounding air in a distance of ca. 10cm from the case surface.

As a rule, the value stated in our data sheet or in the catalogue is based on calculations or practical experience. Usually, these values are sufficient for proper calculation of the application. Please contact us if you require more detailed data or measurements.

Maximum power dissipation P_{max}

Maximum permitted power dissipation for the capacitor's operation.

Ambient temperature Θ_U

Temperature of the surrounding air, measured 10 cm away and at 2/3 of the case height of the capacitor.

Lower category temperature Θ_{min}

Lowest permissible ambient temperature at which a capacitor may be used.

Upper category temperature Θ_{max}

Highest permissible capacitor temperature during operation, i.e. temperature at the hottest point of the case.

BEGRIFFSERLÄUTERUNG für Kondensatoren der Leistungselektronik**Bemessungskapazität (Nennkapazität) C_N**

Nennwert der Kapazität, bezogen auf 20°C, 50 Hz.

Bemessungsspannung (Nennspannung) U_N

Größtwert bzw. Scheitelwert der Spannung, für die der Kondensator dimensioniert und benannt ist (abweichend von anderen Normen für Wechselspannungskondensatoren nicht der Effektivwert!)

Stoßspitzenspannung U_S

Höchster Spitzenwert, der vereinzelt kurzzeitig im Störfall auftreten darf. Maximale Anzahl 1000 mal mit einer Höchstdauer von jeweils 100 ms.

Effektive Wechselspannung U_{rms}

Maximal zulässiger Effektivwert von sinusförmiger Wechselspannung im Dauerbetrieb.

Überlagerte Wechselspannung U_r

Spitze-Spitze-Wert der Wechselkomponente der gleichgerichteten Spannung.

Prüfspannung Belag/Belag U_{TT}

Prüfspannung, mit der alle Kondensatoren als Stückprüfung zwischen den Anschlüssen vor der Auslieferung geprüft werden. Beim Anwender ist eine einmalige Wiederholung dieser Prüfung mit dem 0,9-fachen Wert der Prüfspannung zulässig.

Prüfspannung Belag/Gehäuse U_{TC}

Prüfspannung, mit der alle Kondensatoren zwischen den kurzgeschlossenen Anschlüssen und dem Gehäuse als Stückprüfung vor der Auslieferung geprüft werden. Beim Anwender ist eine einmalige Wiederholung dieser Prüfung zulässig.

Maximalstrom I_{max}

Maximaler Effektivwert des im Dauerbetrieb zulässigen Stromes. Die im Datenblatt angegebenen Werte ergeben sich entweder aus der maximal zulässigen Verlustleistung oder der Stromtragfähigkeit der Anschlüsse.

Spitzenstrom $\hat{I}$

Periodisch zulässiger Spitzenwert des Stromes.

Stoßspitzenstrom I_S

Höchster Spitzenwert, der vereinzelt kurzzeitig im Störfall auftreten darf.

Serienwiderstand R_S

Ersatzwiderstand, welcher die Summe aller im Kondensator auftretenden Ohmschen Widerstände repräsentiert. Maßgebend für die Berechnung der Stromwärmeverluste.

Eigeninduktivität L_e

Repräsentiert die Summe aller induktiven Bestandteile, die konstruktionsbedingt in jedem Kondensator enthalten sind. Die in den Datenblättern und Katalogen angegebenen Werte beruhen i.d.R. auf Berechnungen oder praktischen Erfahrungswerten. Normalerweise reichen diese Angaben für eine Berechnung der Anwendungsverhältnisse völlig aus. Bitte wenden Sie sich an uns, wenn Sie konkretere Angaben oder Messungen benötigen.

Resonanzfrequenz f_{res}

Kapazität und Eigeninduktivität eines jeden Kondensators bilden de facto einen Reihenresonanzkreis. Oberhalb der Resonanzfrequenz überwiegt in diesem LC-Kreis der induktive Anteil, der Kondensator wirkt dann nicht mehr als Kapazität.

Dielektrischer Verlustfaktor $\tan\delta_0$

Konstanter Verlustfaktor des Dielektrikums für alle Kondensatoren bei Nennfrequenz.

Thermischer Widerstand R_{th}

Der thermische Widerstand gibt an, um wieviel Grad sich der Kondensator in Abhängigkeit von der Verlustleistung am Hotspot erwärmt.

Dieser Temperaturanstieg betrifft die Umgebungstemperatur im Abstand von ca. 10cm von der Gehäuseoberfläche.

Der im Datenblatt oder Katalog angegebene Wert beruht i.d.R. auf Berechnungen oder praktischen Erfahrungswerten. Normalerweise reichen diese Angaben für eine Berechnung der Anwendungsverhältnisse völlig aus. Bitte wenden Sie sich an uns, wenn Sie konkretere Angaben oder Messungen benötigen.

Höchste Verlustleistung P_{max}

Maximal zulässige Verlustleistung, mit der der Kondensator betrieben werden darf.

Umgebungstemperatur Θ_U

Temperatur der umgebenden Luft, gemessen in ca. 10 cm Abstand vom Kondensator in etwa 2/3 der Gehäusehöhe.

Untere Grenztemperatur Θ_{min}

Niedrigste Umgebungstemperatur, bei der der Kondensator in Betrieb genommen werden darf.

Obere Grenztemperatur Θ_{max}

Höchste Temperatur, gemessen an der heißesten Stelle des Gehäuses, bei der der Kondensator betrieben werden darf.

DEFINITIONS for Capacitors in Power Electronics**Hotspot temperature Θ_{HOTSPOT}**

Temperature at the hottest spot inside the capacitor.

Rated energy contents EN

Energy stored in the capacitor when charged at rated voltage.

Clearance in air L

The shortest distance between conducting parts of the terminals or between terminals and case.

Creepage distance K

The shortest distance along an insulated surface between conducting parts of the terminals or between terminals and case.

General

Our data sheets outline the typical technical and mechanical characteristics of the described capacitor. The stated values are based on reference type tests, as well as empirical and experimental experience. The real values of individual capacitors may differ within the stated, or commonly known, tolerances. Any information given in this data sheet therefore describes the component in general terms and does not constitute any guarantee of individual technical values.

Custom-made capacitors are designed to the best of our knowledge, based on the specifications and additional information received from the customer. The phrase "According to customer specification" means that such custom-designed capacitors are based on the parameters of the specification with the exception of deviations declared officially by Electronicon in writing (e.g. by CbC-protocol). ELECTRONICON cannot be held responsible for failures arising out of operation under circumstances unknown at the time of design.

It is the responsibility of the user to ensure the suitability and safety of operation of our components under the conditions of his application by dedicated tests.

Safe operation of the capacitors can be expected only if all safety recommendations as well as electrical and thermal specifications as stated on the label, in the data sheets, catalogues and the accompanying mounting instructions are strictly observed, and recommended safety devices are used as intended. Please consider the "General Safety Recommendations" of the power capacitor manufacturers organized in the German ZVEI (<https://www.electronicon.com/en/downloads/application-notes-and-general-information>) ELECTRONICON cannot accept responsibility for whatever damage may arise out of a non-observance.

OPERATING INSTRUCTIONS / VORSCHRIFTEN ZUM BETRIEB**Mounting Location/Cooling**

The useful life of a capacitor depends very much on the average operating temperature. The expected temperature rise of the capacitors can be calculated based on the technical data from this data sheet. The capacitors must be operated in such way that the maximum hotspot temperature stated in the data sheet is not exceeded even under the most critical ambient conditions. Failure to comply with these conditions may lead to drastic reduction of the expected life of the capacitor, or in the worst case failure of the safety mechanisms and rupture of the capacitor.

As a rule, the user has to ensure by his own type test in the application that the permitted maximum hotspot temperature of the capacitor is not exceeded even at worst ambient and operating conditions. If required, we can provide special type test samples with integrated temperature sensors (as standard: PT100). It should be noted that the internal heat balance of large capacitors is only reached after a couple of hours.

! The following recommendations apply if a type test in the application is not possible:

! Give at least 20 mm clearance between the capacitors for natural or 10mm for forced ventilation.

Do not place the capacitors directly above or next to heat sources such as detuning or tuning reactors, bus bars, etc.

CE Identification

The capacitors are marked „CE" when both of the following criteria apply:

- They conform with standard IEC / DIN EN 61071.
- At least one of the AC or DC voltage ratings does not exceed 1500V.

BEGRIFFSERLÄUTERUNG für Kondensatoren der Leistungselektronik**Hotspot-Temperatur Θ_{HOTSPOT}**

Temperatur der heißesten Stelle im Kondensatorinneren.

Nennenergiegehalt E_N

Bei Nennspannung im geladenen Kondensator gespeicherte Energie.

Luftstrecke L

Kürzeste Strecke zwischen leitenden Teilen der Anschlüsse bzw. zwischen Anschlüssen und Gehäuse.

Kriechstrecke K

Kürzeste Strecke entlang der Isolierung zwischen leitenden Teilen der Anschlüsse bzw. zwischen Anschlüssen und Gehäuse.

Allgemeines

Unsere Datenblätter beschreiben die typischen technischen und mechanischen Eigenschaften des beschriebenen Kondensators. Die angegebenen Werte basieren auf Referenztests sowie auf empirischen und experimentellen Erfahrungen. Die tatsächlichen Werte der einzelnen Kondensatoren können innerhalb der angegebenen oder allgemein bekannten Toleranzen abweichen. Alle Informationen in diesem Datenblatt beschreiben daher das Bauteil in allgemeiner Form und stellen keine Garantie für einzelne technische Werte dar.

Kundenspezifische Kondensatoren werden nach bestem Wissen und Gewissen auf der Grundlage der Spezifikationen und zusätzlicher Informationen des Kunden entwickelt. Der Ausdruck "According to customer specification" im Datenblatt bedeutet, dass solche kundenspezifischen Kondensatoren auf den Parametern der Spezifikation basieren, mit Ausnahme von Abweichungen, die offiziell von Electronicon schriftlich (z. B. durch das CbC-Protokoll) erklärt wurden. ELECTRONICON kann nicht für Fehler verantwortlich gemacht werden, die sich aus dem Betrieb unter Umständen ergeben, die zum Zeitpunkt der Konstruktion unbekannt waren.

Es liegt in der Verantwortung des Benutzers, die Eignung und Sicherheit des Betriebs unserer Komponenten unter den Bedingungen seiner Anwendung durch spezielle Tests sicherzustellen.

Ein sicherer Betrieb der Kondensatoren ist nur dann zu erwarten, wenn alle Sicherheitsempfehlungen sowie die auf dem Etikett, Katalogen und den zugehörigen Montageanleitungen angegebenen elektrischen und thermischen Spezifikationen strikt eingehalten werden und die empfohlenen Sicherheitseinrichtungen bestimmungsgemäß verwendet werden. Bitte beachten Sie die "Allgemeinen Sicherheitsempfehlungen" der im deutschen ZVEI organisierten Hersteller von Leistungskondensatoren (<https://www.electronicon.com/de/downloads/application-notes-and-general-information>). ELECTRONICON übernimmt keine Haftung für Schäden, die sich aus einer Nichteinhaltung ergeben.

Einbauort/Kühlung

Die Lebensdauer eines Kondensators hängt sehr stark von der durchschnittlichen Betriebstemperatur ab. Der zu erwartende Temperaturanstieg der Kondensatoren kann anhand der technischen Daten aus diesem Datenblatt berechnet werden. Die Kondensatoren müssen so betrieben werden, dass die im Datenblatt angegebene maximale Hotspot-Temperatur auch unter den kritischsten Umgebungsbedingungen nicht überschritten wird. Die Nichteinhaltung dieser Bedingungen kann zu einer drastischen Reduzierung der zu erwartenden Lebensdauer des Kondensators oder im schlimmsten Fall zum Versagen der Sicherheitsmechanismen und zum Bersten des Kondensators führen.

In der Regel muss der Anwender durch eine eigene Typprüfung in der Applikation sicherstellen, dass die zulässige maximale Hotspot-Temperatur des Kondensators auch bei ungünstigsten Umgebungs- und Betriebsbedingungen nicht überschritten wird. Bei Bedarf können spezielle Typprüfmuster mit integrierten Temperatursensoren geliefert werden (Standard: PT100). Dabei ist zu beachten, dass sich das Wärmegleichgewicht bei großvolumigen Kondensatoren erst nach mehreren Stunden einstellt.

! Die folgenden Empfehlungen gelten, wenn ein Typprüfung in der Anwendung nicht möglich ist:

! Zwischen den und um die Kondensatoren herum sollten mindestens 20 mm Platz für natürliche oder 10 mm für Zwangslüftung belassen werden. Bringen Sie den Kondensator nie direkt neben oder über Wärme Wärmequellen, wie Drosseln u.ä. an.

CE-Kennzeichnung

Die Kondensatoren tragen eine CE-Kennzeichnung, sofern die beiden folgenden Bedingungen erfüllt sind:

- Sie entsprechen der Norm IEC / DIN EN 61071
- Kondensatornennspannung $U_N \leq 1500V$

Appearance

Despite careful handling and strict quality control, traces of production and handling may be left on the surface of the capacitors. Superficial flaws such as slight scratches, colour variations of the material, finger prints, small dents or slight unevenness of the surface do not represent a fault and cannot be accepted as a reason for rejects or claims under warranty.

Vibration Stress According to DIN IEC 68-2-6

The capacitors comply with test standard FC acc. to DIN IEC 68 pt. 2-6 as follows:

Masse des Kondensators capacitor weight	Beanspruchungsdauer test duration	Frequenzbereich frequency range	Max. Beschleunigung max. acceleration	Max. Auslenkung max. displacement amplitude
< 0.5 kg	30 Zyklen cycles	10 ... 500 Hz	50 m/s ²	0.35 mm
0.5 ... 3 kg	30 Zyklen cycles	10 ... 500 Hz	10 m/s ²	0.075 mm
> 3 kg	auf Anfrage Information available on request			

material safety data sheet

Environment Hazards

Our capacitors do not contain PCB, solvents, or any other toxic or banned materials. They do not contain hazardous substances acc. to «Chemische Verbotsverordnung» (based on European guidelines 2003/53/EG and 76/769/EWG), «Gefahrstoffverordnung» (GefStoffV) and «Bedarfsgegenstandsverordnung» (BedGgStV).

Not classified as «dangerous goods» acc. to transit rules. The capacitors do not have to be marked under the Regulations for Hazardous Goods. They are rated WGK 0 (water risk category 0 «no general threat to water»).

No danger for health if applied properly. In case of skin contact with filling liquids, clean with water and soap.

All capacitors manufactured after 1st January, 2006 are made with lead-free solder tin.

The capacitors comply with the specifications of the ROHS, REACH and SVHC directives.

Disposal

Capacitors are components of electrical devices. They are NOT equipment or devices by themselves, and not subject to the Waste Electrical and Electronic Equipment Directive (WEEE). We recommend disposing of the capacitors through professional recycling centers for electric/electronic waste. Make also sure to consult your national rules and restrictions for waste and disposal.

The filling materials contain solidified polyurethane mixtures based on vegetable oil. The capacitors can be disposed of in accordance with European waste catalogue (EWC) No. 16 02 16 ("Components removed from discarded equipment other than those mentioned in 16 02 15").

Caution: When touching or disposing capacitors, please consider that even after days and weeks these capacitors may still be charged with high voltages!

SAFETY IN OPERATION

Protection Against Overvoltages and External Short Circuits

As shown above, the capacitors are self-healing and regenerate themselves after breakdowns of the dielectric. For voltages within the permitted testing and operating maximum the capacitors are overvoltage-proof. They are also proof against external short circuits as far as the resulting surge discharges do not exceed the specified current limits (I_s).

! MIND HAZARDS OF EXPLOSION AND FIRE

Capacitors consist mainly of polypropylene (up to 90%), i.e. their energy content is relatively high. They may rupture and ignite as a result of internal faults or external overload (e.g. temperature, overvoltage, harmonic distortion). It must therefore be ensured, by appropriate measures, that they do not form any hazard to their environment in the event of failure or malfunction of the safety mechanism.

FIRE LOAD: approx. 40 MJ/kg

EXTINGUISH WITH: dry extinguisher CO₂, foam

$1.1 \times U_N$	30% of the service period der Betriebszeit
$1.15 \times U_N$	30 min/d
$1.2 \times U_N$	5 min/d
$1.3 \times U_N$	1 min/d
$1.5 \times U_N$	100 ms no more than 1000 times max. 1000 mal

Aussehen

Trotz sorgfältiger Handhabung und strenger Qualitätskontrolle können Produktions- und Handhabungsspuren auf der Oberfläche der Kondensatoren verbleiben. Oberflächliche Mängel wie leichte Kratzer, Farbabweichungen des Materials, Fingerabdrücke, kleine Dellen oder leichte Unebenheiten der Oberfläche sind keine Fehler und können nicht als Grund für Beanstandungen oder Gewährleistungsansprüche akzeptiert werden.

Schwingungsbelastung nach DIN IEC 68-2-6

Die Kondensatoren genügen der Prüfung FC nach DIN IEC 68 T 2-6 mit folgenden Werten:

Materialbetriebssicherheitsdatenblatt

Umweltverträglichkeit

Unsere Kondensatoren enthalten kein PCB, keine Lösemittel, oder sonstige giftige oder verbotene Stoffe, keine gefährlichen Inhaltsstoffe gemäß Chemikalien-Verbotsverordnung (ChemVerbotsV), Gefahrstoffverordnung (GefStoffV) und Bedarfsgegenstände-Verordnung (BedGgStV).

Sie stellen kein Gefahrgut im Sinne der Transportvorschriften dar. Es ist keine Kennzeichnung nach Gefahrstoffverordnung erforderlich. Sie unterliegen nicht der TA-Luft und auch nicht der Verordnung für brennbare Flüssigkeiten (VbF). Sie sind eingestuft in die WGK 0 (Wassergefährdungsklasse Null, im Allgemeinen nicht wassergefährdend).

Bei sachgemäßer Anwendung gehen vom Produkt keine Gesundheitsgefahren aus. Bei Hautkontakt mit dem Kondensatorfüllmittel sind die betroffenen Hautpartien mit Wasser und Seife zu reinigen.

Alle ab 01.01.2006 gefertigten Kondensatoren sind mit bleifreiem Lötinn gearbeitet.

Die Kondensatoren entsprechen den Spezifikationen der ROHS-, REACH- und SVHC-Richtlinien.

Entsorgung

Kondensatoren sind Komponenten von elektrischen Geräten. Sie sind KEINE Geräte oder Geräte für sich und unterliegen nicht der Richtlinie über Elektro- und Elektronik-Altgeräte (WEEE). Wir empfehlen die Entsorgung der Kondensatoren durch professionelle Recyclingzentren für Elektro / Elektronikschrott. Bitte beachten Sie auch die nationalen Vorschriften und Beschränkungen für Abfall und Entsorgung.

Die Füllstoffe enthalten verfestigte Polyurethan-Mischungen auf Pflanzenölbasis. Die Kondensatoren können gemäß Europäischem Abfallkatalog (EWC) Nr. 16 02 16 ("Ausrangierte Geräte außer den unter 16 02 15 genannten Komponenten") entsorgt werden.

Achtung: Bitte beachten Sie vor dem Berühren, dass Kondensatoren auch nach Tagen und Wochen noch hohen Spannungen enthalten können!

BETRIEBSSICHERHEIT

Sicherheit bei Überspannungen und äußeren Kurzschlüssen

Die Kondensatoren sind aufgrund des oben beschriebenen Aufbaus überspannungsfest, da sich die Kondensatoren nach einem Durchschlag im Dielektrikum selbst regenerieren, sofern die zulässigen Prüf- und Betriebsspannungen nicht überschritten werden. Sie sind außerdem sicher gegen äußere Kurzschlüsse, sofern bei den dabei entstehenden Stoßentladungen die zugelassenen Grenzströme (I_s) nicht überschritten werden.

! BERSTRIKO UND BRANDLAST BEACHTEN

Kondensatoren bestehen zu bis zu 90% aus Polypropylen, d.h. ihre Brandlast ist relativ hoch. Infolge von internen Fehlern oder externen Faktoren (z.B. Temperatur, Überspannung, Oberschwingungen) können sie platzen und sich entzünden. Deshalb ist durch geeignete Maßnahmen dafür zu sorgen, dass sie im Fehlerfall bzw. bei einem Versagen der Sicherungsmechanismen kein Risiko für ihre Umgebung darstellen.

BRANDLAST: ca. 40MJ/kg

LÖSCHMITTEL: Trockenlöschmittel CO₂, Schaum

IEC 61071
Permitted Overvoltages
Zulässige Überspannungen